


Astra

Ceiling Recessed

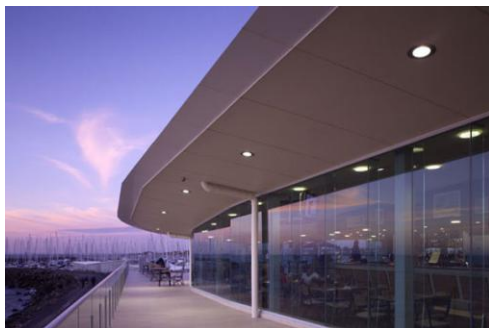

A compact recessed exterior downlight with a round or square front frame design. Options of stainless steel or powder coating aluminium front frame. The luminaires are designed for use in interior and exterior applications in shopping mall and public areas as architectural ceiling downlight. Main characteristics are low glare and limited maintenance concept.

The luminaire rated as CLASS I with remote driver. Colour temperature 2700K,3000K and 4000K, LED CRI >80 and life time 50,000 Hours.

Low copper content die-cast aluminium housing ensuring high corrosion resistance. Aluminium frame thickness 6mm. with grade 304 stainless steel front frame. Stainless steel fasteners in grade 316. Power is provided to the luminaire through a single PG9 water tight cable gland. Durable silicone rubber gasket and clear toughened glass

Perfect for Hotels, Restaurants, Homes, Product Displays , Cafes, Lobbies, Auditoriums .

Un downlight exterior empotrado compacto con un diseño de marco frontal redondo o cuadrado. Opciones de marco delantero de aluminio de acero inoxidable o recubrimiento en polvo. Las luminarias están diseñadas para su uso en aplicaciones interiores y exteriores en centros comerciales y áreas públicas como downlight de techo arquitectónico. Las características principales son bajo resplandor y concepto de mantenimiento limitado.

La luminaria clasificada como CLASE I con controlador remoto. Temperatura de color 2700K, 3000K y 4000K, LED CRI> 80 y tiempo de vida 50,000 horas.

Carcasa de aluminio fundido a presión de bajo contenido de cobre que garantiza una alta resistencia a la corrosión. Grosor del marco de aluminio de 6 mm. con marco delantero de acero inoxidable grado 304. Sujetadores de acero inoxidable en grado 316. Se proporciona energía a la luminaria a través de un solo prensaestopas PG9 hermético. Junta de goma de silicona duradera y vidrio endurecido transparente

Perfecto para hoteles, restaurantes, casas, exhibidores de productos, cafés, vestíbulos, auditorios.

Robust

outdoor

Astra

Ceiling Recessed




Astra Mini



Astra Midi

Lamp Type COB
Dimmable Optional
Power Supply 190V-240V / 50-60Hz
Control On / Off
Median useful life L70B10 50,000 Hours
Housing Body Aluminum + Tempered Glass.
Installation Type Recessed Mounted
Ingress protection code IP66
Mech. impact Ik07
Power Factor 0.9+
Working Temperature Ta : -15°C ~ +45°C
Protection Class IEC Safety Class II

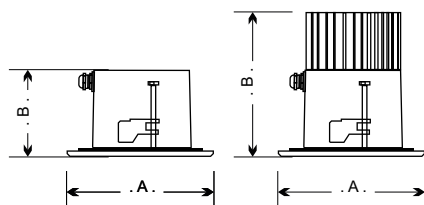

* Additional space for driver needed separately

Ordering Guide Sample *Ejemplo de la guía de pedido*

Astra	SR 3000	15	30	Tilt	AL	
Model	CCT	Power	Beam Angle	Trim		
			Ángulo de haz	AL-Aluminum		
				ST-Steel		

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz N . M	Dia Ø 'A' diámetro	Height 'B' altura	Cut Hole agujero cortado
Astra Mini	15	27K.30K.40K.50K	1200	20°.30°.40°.60°	142mm	100 mm	125 mm
Astra Mini	25	27K.30K.40K.50K	2130	20°.30°.40°.60°	142mm	152mm	125mm
Astra Midi	30	27K.30K.40K.50K	2470	30°.44°.60°	142mm	152mm	150mm
Astra Midi	36	27K.30K.40K.50K	2870	30°.44°.60°	174mm	174mm	150mm
Astra Midi	40	27K.30K.40K.50K	3440	30°.44°.60°	174mm	174mm	150mm