

Face

Flood Luminaire



Face is a flood luminaire for outdoor vertical surface with a sleek appearance .

Face comes in two types of luminaire with

- Symmetric Light Distribution
- Asymmetric Light Distribution

Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in ballast 220-240V 50-60Hz, with CREE XP-E LED. IP65 rating, while design adds a contemporary touch to any façade.

Face es una luminaria de inundación para superficie vertical al aire libre con una apariencia elegante.

Face viene en dos tipos de luminaria con

- Distribución simétrica Luz*
- Asymmetric De distribución ligera*

Fosfo-cromatizada y polvo de poliéster recubierto cuerpo fundido a presión libre de cobre de aluminio, vidrio de seguridad templado, junta de silicona moldeada y tornillos de acero inoxidable. Balastro incorporado 220-240 V 50-60 Hz, con 48 Puntuación CREE XP-E LED. Ip65.

mientras que los anuncios now.design un toque contemporáneo a cualquier fachada.

Anti Glare

outdoor

Face

Flood Luminaire




Face S



Face AS

Product Information

- > Lamp Type
LED
- > Dimming Options
Not Available
- > Nominal Operating Voltage
180-240VAC / 50Hz
- > Control Type
On / Off
- > Median useful life
L70B10 75,000 Hours
- > Materials
Die-Cast Aluminum + PMMA Diffuser,
Stainless Steel Screws
- > Installation Type
Surface Mounted
- > Ingress protection
Code IP66
- > Mech. impact
Ik07
- > Power Factor
0.9+
- > Working Temperature
Ta : -15°C ~ +55°C
- > Protection Class
IEC Safety Class I
- > Finish
Polyester powder coat with
phospho-chromated pre
finish.



W90

NW60

NW48

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz
Face S	100	3000k, 4000k, 6000k	8000	48°,60°
Face S	82		7650	48°,60°
Face AS	60		5120	120° x70°


Ordering Guide Sample *Ejemplo de la guía de pedido*

MO-WATT-ITL-CT-VA-OA-OB

EXAMPLE : FACE 07 SM 30 BA01 OA02 OB01

MO	Model	WATT	ITL	Installation Type	CT	C.C.T	BA+	Beam Type BA	OA+	Trim Colour	OB+	Voltage
	Face S	100	SM	Surface Mounted	27	2700K	01	48°,60°	01	Graphite	01	220VAC
	Face AS	82			30	3000K	02	AS 120° x70°	02	Grey	02	24VDC
		60			40	4000K						

Product Dimensions *Dimensión del producto*

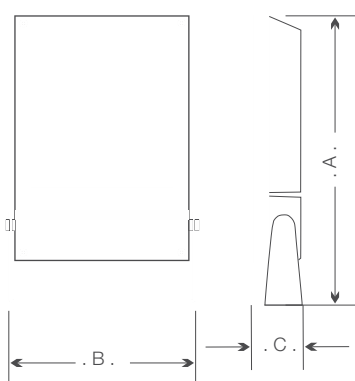


Model / Watt modelo / power	Height A altura	Width B anchura	Depth C fondo
Face S	386mm	235mm	66mm
Face AS	386mm	235mm	66mm

Optional Accessories *Accesorios Opcionales*



IP66 3 WAY
Connector
AVJ1L



IP66 Connector
AVM1L

Planning Aid

** For Planning Aid , visit <https://www.avadalight.es/planning-aid/>

View Online

Face, Category page: visit <https://www.avadalight.es/flood-highbay/>

5 Years Warranty

As a globally leading luminaire manufacturer, AVADA Lighting provides a five-year warranty for its complete product range within all European Countries.

Avada Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.