

Par

Recessed wall luminaires



AVADA® Par is sleek and slim LED based wall luminaire designed to perfection. Par has multiple applications and capabilities to produce most modern ideas for the time.

Par can for used as walk-over , wall recessed . and ceiling recessed .Modern floor patterns can also be designed accordingly.

The medium voltage version is preferred to be used in wall, rather the low voltage for the walk-over application. is a is a well-known member of the Avada's outdoor range.


AVADA® Par es una luminaria de pared elegante y delgada diseñada a la perfección. Par tiene múltiples aplicaciones y capacidades para producir las ideas más modernas para el momento.

Par puede para utilizado como walk-over, pared empotrada. Y techo empotrado. Moderno Patrones de suelo también se pueden diseñar en consecuencia.


La versión de media tensión se preferred para ser utilizado en la pared, más bien el voltaje bajo para la aplicación del walk-over. Es un miembro muy conocido de la gama al aire libre de Avada.

También ha estado disponible con LED

slim & sleek



Par3




Par 6




Par 25




Lamp Type LED
 Dimmable No
 Power Supply 220V-240V / 50-60Hz
 Control On / Off
 Median useful life L70B10 50,000 Hours
 Housing Body : Stainless Steel 316
 Glass 7 mm Tempered
 Installation Type Wall / Ground Recessed
 Ingress protection code IP67
 Mech. impact IK10
 Working Temperature Ta : -25°C ~ +45°C
 CRI 80+
 Power Factor 0.9+
 Protection Class IEC Safety Class II



Diffused 120

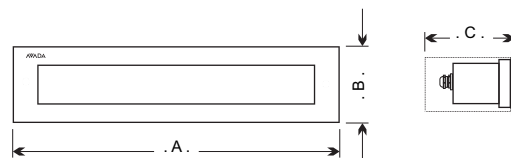

Ordering Guide Sample *Ejemplo de la guía de pedido*

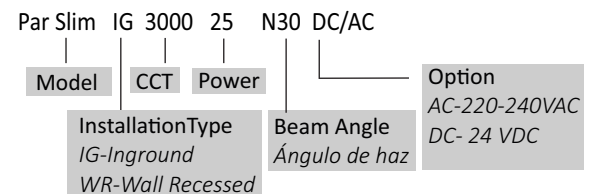

| Model modelo | Power energía | Color temperature CCT temperatura del color | Luminous Flux lm flujo luminoso | Beam angle deg. Ángulo de haz | Length A longitud | Height B altura | Depth C fondo |
|-----------------|------------------|------------------------------------------------|------------------------------------|----------------------------------|----------------------|--------------------|------------------|
| Par3 | 3.5 | 3000k.4000k.R.G.B | 200 | 120° | 195mm | 63mm | 90mm |
| Par6 | 6.4 | 3000k.4000k.R.G.B | 360 | 120° | 328mm | 63 mm | 90mm |
| Par13 | 13.5 | 3000k.4000k.R.G.B | 525 | 120° | 548mm | 68mm | 80mm |
| Par25 | 24.5 | 3000k.4000k.R.G.B | 1025 | 120° | 1025mm | 68mm | 80mm |