

Retro Series

Pole post luminaire

AVADA® Retro con distribución luminosa simétrica. Desarrollado para complementar la gama Eurasia de postes y luminarias de pared. Diseñado para diversas aplicaciones, incluyendo entradas, jardines, recintos y caminos.

La luminaria clasificada como CLASE I con accionador integral. Temperatura de color 3000K y 4000K, LED CRI> tiempo de la vida 80and 50.000 horas.

Columna de aluminio extruido y carcasa de bajo contenido de cobre fundido a presión con alta resistencia a la corrosión. Cierres de acero inoxidable en grado 316. Junta de goma de silicona duradera y difusor de policarbonato estabilizado UV resistente a los impactos.

La carcasa se trata con un producto químico cromatizado

Protección antes del revestimiento en polvo, garantizando alta resistencia a la corrosión. Reflector de aluminio de alta pureza.

AVADA® Retro decorative bollard with a symmetrical light distribution. Developed to compliment the Eurasia range of post top and wall light luminaires. Designed for various applications including entrances, gardens, precincts and pathways.

The luminaire rated as CLASS I with integral driver. Colour temperature 3000K and 4000K, LED CRI>80 and life time 50,000 Hours.


Extruded aluminum column and low copper content die cast housing with high corrosion resistance. Stainless steel fasteners in grade 316. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate diffuser.

Housing is treated with a chemical chromatised protection before powder coating, ensuring high corrosion resistance. Anodized high purity aluminum reflector.

outdoor

Retro Series

Pole post

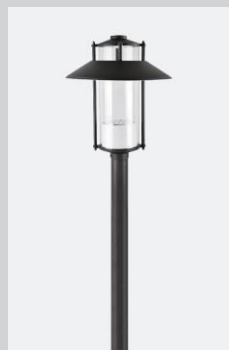

Retro 2



Retro 3


Lamp Type LED
Dimmable No
Power Supply 220V-240V / 50-60Hz
Control On / Off
Median useful life L70B10 35,000 Hours
Housing Body Aluminum + PMMA
Installation Type Pole Top
Ingress protection code IP65
Mech. impact IK09
Working Temperature Ta : -25°C ~ +45°C
Power Factor 0.9+
Protection Class IEC Safety Class I



IK09

IP65

850°C

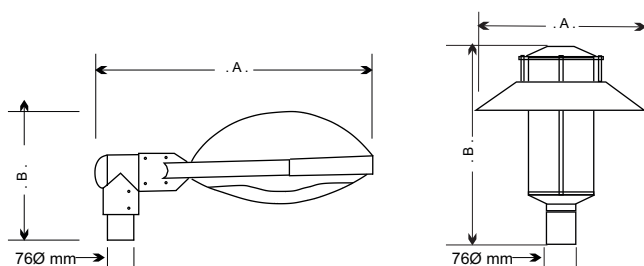

Ordering Guide Sample *Ejemplo de la guía de pedido*

Retro 2	PT 3000	20	Color
Model	CCT	Power	
InstallationType			Body Color
Pole top			- Graphite
			- Grey

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz	Dia Ø A diámetro	Height B altura	Width B anchura
Retro 2	20	3000k.4000k.6000k	1350	Diffused 100%	520mm	600mm	
Retro 2	30	3000k.4000k.6000k	1900	Diffused 100%	764mm	260mm	
Retro 3	35	3000k.4000k.6000k	2940	Asymmetrical		260mm	765mm
Retro 3	45	3000k.4000k.6000k	4400	Asymmetrical		260mm	765mm
Retro 3	55	3000k.4000k.6000k	5390	Asymmetrical		260mm	765mm